



CARTON SEALING SOLUTIONS



QUICK HIGHLIGHTS

SEALS UP TO 27 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Designed Specifically to Seal Egg **Industry Standard Sizes**
- Plastic Crate Bypass-Through
- Low Tape/No Tape Monitoring System
- Equipped with Allen-Bradley PLC w/Ethernet Capabilities
- Maintenance Free Air Cylinder









FREE PRODUCT SUPPORT:

FRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION WWW.BESTPACK.COM

CARTON RANGE

Length (min.-max.) (6.0"-25.5")

Width (min.-max.) (6.0"-14.0")

Height (min.-max.) (6.5"-20.0")



FULLY AUTOMATIC RANDOM CARTON SEALER

The BestPack™ CSEG Series is a Fully Automatic Random Carton Sealer. Designed for flexibility and high speed, our advanced engineering allows the CSEG to seal cartons and crate pass through at 27 cartons per minute. Our CSEG machine is built for the egg industry's standard carton sizes: 30, 24, 18, 15, 12, 9, and 5 dozen, as well as for reusable plastic crates.

VERSION 5.0 1123



DOUBLE STACKED CYLINDERS

Rapidly achieve the desired carton height based on common industry caton sizes.



SEALS STANDARD EGG CARTON SIZES

Seals 5, 7.5, 9, 12, 15, 24, & 30 dozen egg carton industry standard sizes.



DROP DOWN INDEXER

Withstand the pressure from back-ups while creating optimal spacing to ensure the machine is uninterrupted.



BESTPACK'S "SOFT TOUCH" SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.




EWON VPN WIFI MODULE

Allows for easy diagnosis for your machine saving you on costly maintenance visits and downtime.



ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

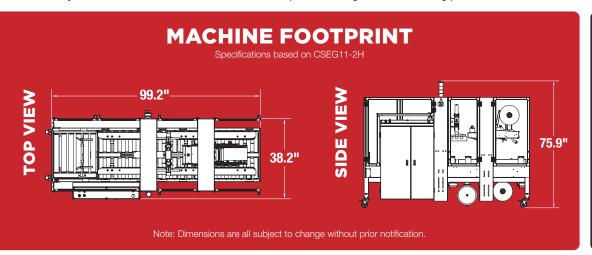

OPTIONS

- Available in Stainless Steel
- Servo Motor Capabilities
- Additional safety options

 Entry/Exit Gates
 AB Safety Relay, Dual Channel
 Interlocks and Dump Valves

POPULAR CSEG MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min, - max.) x WIDTH (min, - max.) x HEIGHT (min, - max.)	CONVEYOR HEIGHT HEIGHT (min max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
CSEG11-2H** 2" Tape Head	(99.2") x (38.2") x (75.9")	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(25.5" - 30.0")	Up to 27	1,320	110 Volts 60 Hz	85 PSI, 12+ SCFM
CSEG11-3H** 3" Tape Head	(99.2") x (38.2") x (75.9")	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(25.5" - 30.0")	Up to 27	1,320	110 Volts 60 Hz	85 PSI, 12+ SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY I **HIGH SPEED

STANDAR	ID EUU GANTUN SIZES.						
5 Dozen	(12.0" x 12.0" x 5.0")	9 Dozen	(12.0" x 12.0" x 8.75" - 9.0")	15 Dozen	(12.0" x 12.0" x 13.75" - 14.0")	30 Dozen	(24.0" x 12.0" x 13.5")
7.5 Dozen	(12.0" x 12.0" x 8.0")	12 Dozen	(20.0" x 12.0" x 11.5")	24 Dozen	(24.0" x 12.0" x 11.0")		

