

# OUR MOST INNOVATIVE FULLY AUTOMATIC RANDOM

CARTON SEALING SOLUTION



EQUIPPED WITH

**4 SERVO MOTORS**

FOR SPEED, DURABILITY,  
AND RELIABILITY IN MIND

## QUICK HIGHLIGHTS

SEALS UP TO 30 CARTONS PER/MIN.\*

\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons
- Equipped with Allen-Bradley Servos, PLC, HMI and VFD
- Carton Bypass Feature (Bypass Folding & Top Sealing)
- Low Tape/No Tape Monitoring System




(95.7" x 60.8" x 65.0")



## CARTON RANGE

Specifications based on CSS22-2

Length (min. - max.)	Width (min. - max.)	Height (min. - max.)
(10.0" - 25.5")	(7.0" - 20.0")	(4.0" - 20.0")



## CSS FULL AUTOMATIC RANDOM SERVO CARTON SEALER

The BestPack™ CSS Series is a Fully Automatic Random Carton Sealer featuring our servo driven technology, which allows for fast height adjustment, quick width adjustment and smooth sealing operations. Our **complimentary level 1** tech support uses the VPN module in the CSS, to enable our technicians to detect real-time machine issues for timely assistance and optimal performance.



**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

WWW.BESTPACK.COM

VERSION 5.0\_1123



### RANDOM SIDEBELT DRIVE

Gently pulls product through while reducing less wear & tear on parts.



### 3 INDEPENDENT STATIONS

Increased throughput speed by indexing, flap folding, and sealing multiple cartons in one seamless operation.



### HMI (HUMAN MACHINE INTERFACE)

Operator control panel that provides reliable data and troubleshooting at your fingertips.



### 4 SERVO MOTORS

3x faster compared to a non-servo machine, precise control for each sealing stage.



### EWON VPN WIFI MODULE

Allows for easy diagnosis for your machine saving you on costly maintenance visits and downtime.




### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.


## MACHINE FOOTPRINT

Specifications based on CSS22-2

TOP VIEW

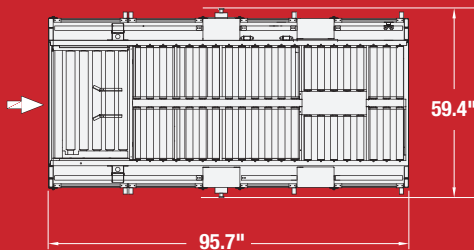

SIDE VIEW

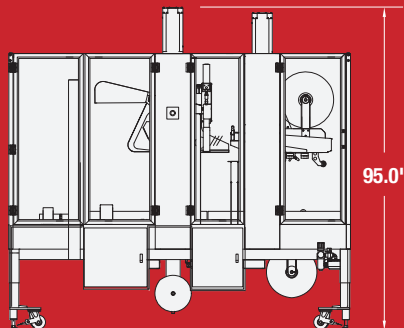

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Available in Stainless Steel
- Bypass Capabilities
- Additional Safety Options:
  - Entry / Exit Gates
  - Safety Relay

## POPULAR CSS MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN.
CSS222-2H 2" Tape Head	(95.7") x (59.4") x (95"~100")	(10.0" - 25.5") x (7.0" - 20.0") x (4.0" - 20.0")	480 Volts 3 Phase	80 PSI, 5 SCFM	Up to 30
CSS222-3H 3" Tape Head	(95.7") x (59.4") x (95"~100")	(10.0" - 25.5") x (7.0" - 20.0") x (4.0" - 20.0")	480 Volts 3 Phase	80 PSI, 5 SCFM	Up to 30
CSS333-2H 2" Tape Head	(123.7") x (71.7") x (105"~110")	(8.0" - 38.0") x (4.0" - 30.0") x (4.0" - 30.0")	480 Volts 3 Phase 35 AMPS	85 PSI, 3.5 SCFM	Up to 13
CSS333-3H 3" Tape Head	(123.7") x (71.7") x (105"~110")	(8.0" - 38.0") x (4.0" - 30.0") x (4.0" - 30.0")	480 Volts 3 Phase 35 AMPS	85 PSI, 3.5 SCFM	Up to 13

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

ALL MODELS AVAILABLE IN FOOD GRADE 304 STAINLESS STEEL  
\* WIDTH IS LIMITED TO 11" WHEN HEIGHT IS BELOW 6"



For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**