

# ENTRY LEVEL UNIFORM BOTTOM

## CARTON SEALING SOLUTION



**MAXIMIZING  
EFFICIENCY**

**WITH BOTTOM CARTON SEALING**

### QUICK HIGHLIGHTS


**SEALS UP TO 40 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Eliminates Manual Bottom Sealing
- Increase Throughput from Manual Erected Boxes
- Side Belt Drive System
- Seals Uniform Sized Cartons
- User-Friendly Design Ensures Consistent Seals Everytime

### CARTON RANGE

Specifications based on MS20-2

Length (min. - max.)	Width (min. - max.)	Height (min. - max.)
(6.0" - U)	(4.25" - 20.0")	(4.0+)"



## MS MANUAL SIDEDRIVE BOTTOM ONLY SEALER


Optimize your packaging workflow using BestPack™ MS20 Series Bottom Sealer Tape Carton Sealer, which stands out as our most widely favored model. This operator-fed adjustable carton sealing machine is designed to accommodate light-to-heavy-duty uniform bottom carton closure requirements. Offering a user-friendly experience, this solution minimizes tape usage and labor expenses, presenting a cost-effective packaging solution.



**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 1.0\_1123

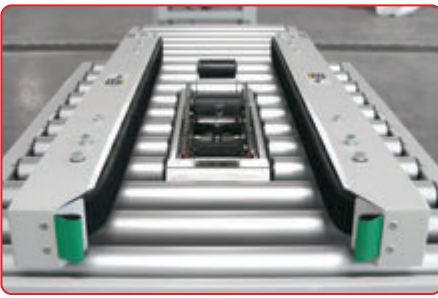

### SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### BESTPACK'S AC TAPE HEAD

Provides a clean and consistent seal, user friendly design.



### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.



### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.



### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.




### MOUNTING OF ON/OFF ELECTRICAL BOX

Provides flexibility in workflow process.

## MACHINE FOOTPRINT

Specifications based on MS20-2

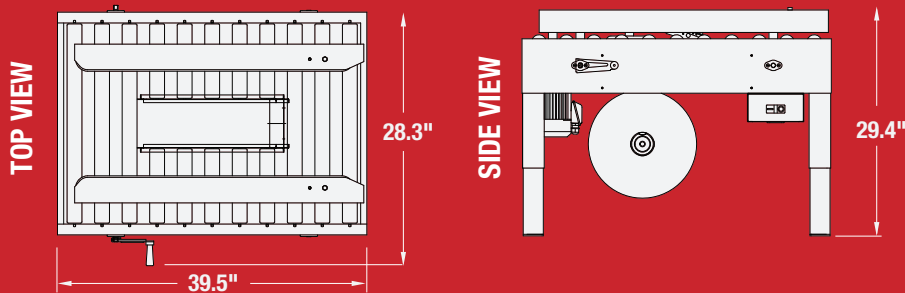

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Available in Stainless Steel
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- High-Speed Options (Up to 125ft. per min.)

## POPULAR MS BOTTOM ONLY MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
MS20-2 2" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (4.25" - 20.0")	(20.5" - 30.0")	Up to 40	263	110 Volts 60 Hz	N/A
MS20-3 3" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (5.25" - 20.0")	(20.5" - 30.0")	Up to 40	263	110 Volts 60 Hz	N/A
MS30-2 2" Tape Head	(39.5") x (39.4") x (29.4")	(6.0" - U) x (4.25" - 30.0")	(20.5" - 30.0")	Up to 40	310	110 Volts 60 Hz	N/A
MS30-3 3" Tape Head	(39.5") x (39.4") x (29.4")	(6.0" - U) x (5.25" - 30.0")	(20.5" - 30.0")	Up to 40	310	110 Volts 60 Hz	N/A

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY  
U - UNLIMITED  
\*\* BASED ON CUSTOMER APPLICATION



# BESTPACK

For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**

© 2024 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.