

# FULLY AUTOMATIC QUAD DRIVE SEALER

CARTON SEALING SOLUTIONS




**UNLOCK THE  
POWER OF DATA**  
REAL-TIME DATA FROM ANYWHERE




**BONUS  
2-YEAR  
WARRANTY**  
AS A BPA MEMBER\*

## QUICK HIGHLIGHTS


**SEALS UP TO 57 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Built in Safety Gates
- Automatic Top Flap Folding
- Infeed and Outfeed Conveyor Control
- Includes our Data Advantage System
  - Realtime Monitoring Dashboard
  - Advanced Performance Analytics/Metrics
  - Increased Productivity and Reduced Downtime

## CARTON RANGE

Specifications based on AQ22-2

Length (min.-max.)	Width (min.-max.)	Height (min.-max.)
(8.0"-27.5")	(7.0"-20.0")	(5.5"-20.0")



## AQ FULLY AUTOMATIC QUAD DRIVE

The BestPack™ AQ Series is an fully automatic, carton sealer designed to meet the needs of uniform in-line carton closure applications. The four belt drives are powered by three electric 110V UL approved motors. The quad-belt technology allows for more carton stability and effective sealing in rugged applications. The AQ model, that closes all top flaps and seals the top & bottom of the carton, is dtesigned with a stable four-column support structure.



**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.0\_1123



### TOP FLAP FOLDING KICKER & HORNS

Eliminates manual folding of top flaps, boosting throughput and efficiency.



### QUAD BELTS

Providing you the stability you need for tall and unstable applications.




### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



### INTERLOCK SAFETY GATES

Providing safety and preventing workplace injury.

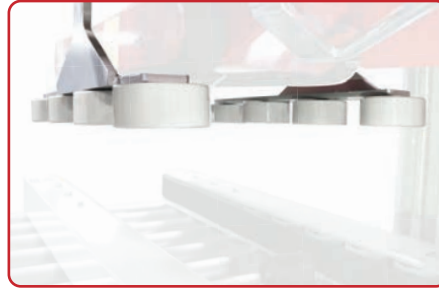

### COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.





### DAS (DATA ADVANTAGE SYSTEM)

An all-in one service that can help you identify areas of production loss, track machine usage history, monitor your machines in real time.

## MACHINE FOOTPRINT

Specifications based on AQ22-2

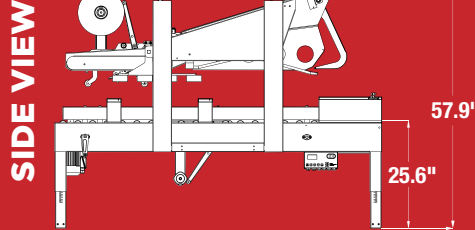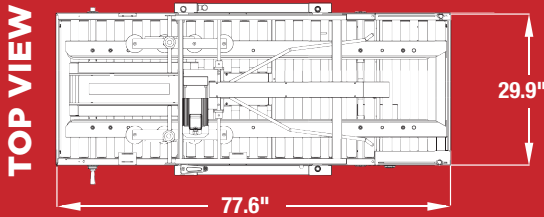

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- High Speed Options
  - VFD Motor Upgrade (150ft per min.)
  - High Speed Motor Upgrade (125ft per min.)
- Available in Stainless Steel
- Additional Safety Options:
  - Sealing Area Gates
  - Bottom Skirt Guard
  - Exit Gates
  - Safety Gates
- Indexer Option

## POPULAR AQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN.****
AQ12-2 2" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 34
AQ12-3H** 3" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 57
AQ22-2 2" Tape Head	(77.5") x (29.9") x (57.9")*	(8.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 34
AQ22-3H** 3" Tape Head	(77.5") x (29.9") x (57.9")*	(8.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 57

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\* SAFETY GATES ARE AN ADDITIONAL 20" LONG | \*\* HIGH SPEED | \*\*\* OUTSIDE DIMENSIONS ONLY | \*\*\*\*BASED ON CUSTOMER APPLICATION



For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**