


# HIGH PERFORMANCE TOP CARTON PULL

*CARTON ERECTING SOLUTION*

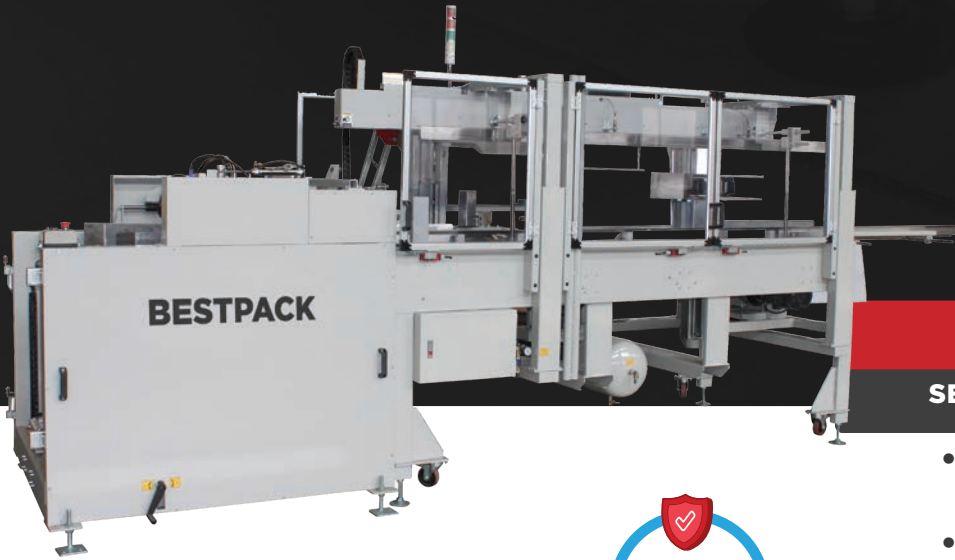


**BUILT FOR  
ERECTING LARGE  
CARTONS**

## QUICK HIGHLIGHTS

**SEALS UP TO 10 CARTONS PER/MIN.\***

\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS


- Carton Straight Fed from the Hopper/Top Pulled
- Manual Jog Button for Step-by-Step Activation
- Quick Easy Manual Length, Width and Height Adjustments
- Hopper Holds 70-100 Cartons (Depending on Carton Size)
- Ability to Extend Hopper

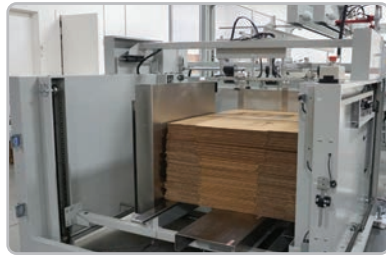

## CARTON RANGE

Specifications based on ESHT33

Length (min. - max.) <b>(16.0" - 45.5")</b>	Width (min. - max.) <b>(10" - 30.5")</b>	Height (min. - max.) <b>(8.0" - 31.5")</b>
---	--	--



## ESHT L-TYPE SUCTION CUP CASE ERECTOR

Our BestPack™ Packaging ESHT is an innovative high performance carton erector/sealer using a top carton pull system. This design allows for large cartons that can be difficult to erect and yet still handles a wide range of carton sizes. The ESHT erector is built for heavy usage with quick and simple carton size change over. If you are looking for a simple yet heavy built carton erector, this is a must-see unit. Optional automatic infeed conveyors are available for pre-stacked cartons yet to be erected.



**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.1\_0924



### VENTURI SUCTION CUP SYSTEM

Ensures reliable attachment by amplifying air pressure for strong grip on cartons.



### INTERLOCK SAFETY GATES

Providing safety and preventing workplace injury.



### HEAVY DUTY FRAME

4x longer lasting than bolted frames.



### LOW TAPE/ NO TAPE/ NO CUT SENSORS

Low tape, no tape and no cut monitoring system notifies the user of potential downtime.



### HMI- HUMAN MACHINE INTERFACE

Operator controls panel that provides reliable data & troubleshooting at your fingertips.




### CARTON ON DEMAND SENSORS

Included with your carton erector, preventing carton jamming & down time

## MACHINE FOOTPRINT

Specifications based on ESHT22-2

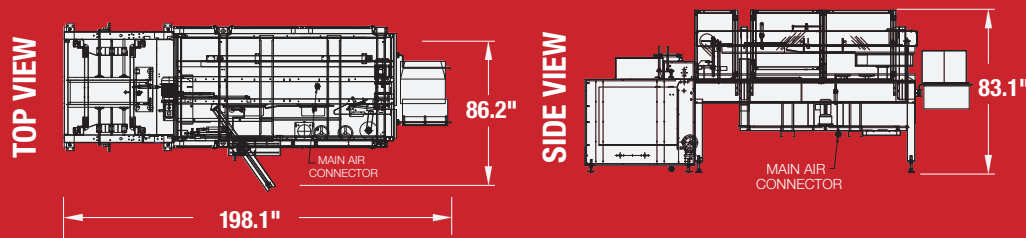

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Pre-Stacked Automatic Carton Infeed Conveyor
- Automatic Tape Head Center Seal Adjustment
- Available in Stainless Steel
- Exit Conveyor

## POPULAR ESHT MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
ESHT22-2 2" Tape Head	(198.1") x (86.2") x (83.1")	(12.0" - 30.0") x (8.0" - 24.0") x (6.0" - 20.0")	(25.5" - 31.5")	Up to 10	3,450	110 Volts 60 Single Phase Current Hz	100 PSI, 10+ SCFM
ESHT22-3 3" Tape Head	(198.1") x (86.2") x (83.1")	(12.0" - 30.0") x (8.0" - 24.0") x (6.0" - 20.0")	(25.5" - 31.5")	Up to 10	3,450	110 Volts 60 Single Phase Current Hz	100 PSI, 10+ SCFM
ESHT33-3 3" Tape Head	TBA	(16.0" - 45.5") x (10.0" - 30.5") x (8.0" - 31.5")	(26.8" - 32.0")	Up to 6	TBA	208 Volts 3 Phase	TBA
ESHT44-2 2" Tape Head	TBA	(24.0" - 60.5") x (12.0" - 40.5") x (8.0" - 41.5")	(26.8" - 32.0")	Up to 2-3	TBA	480 Volts 3 Phase	TBA

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY | \*\* BASED ON CUSTOMER APPLICATION



For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**