

# BESTPACK'S MOST AFFORDABLE STAINLESS

CARTON SEALING SOLUTION

**PLUG & SEAL**  
SOLUTION



## QUICK HIGHLIGHTS


**SEALS UP TO 20 CARTONS PER/MIN.**

- Entry Level Automation Solution
- Bottom Belt Drive with Guide Rail Centering Mechanism
- Manually Adjust Height and Width of Carton Sealer for Each Carton Size
- Mounting of Electrical Box on Either Side
- Low Cost of Ownership

## CARTON RANGE

Specifications based on MBD22-2S

Length (min. - max.)	Width (min. - max.)	Height (min. - max.)
(6.0" - U)	(6.5" - 20.0")	(3.0" - 20.25")



## MBD-S STAINLESS MANUAL BOTTOM DRIVE

The BestPack™ MBD 304 Stainless Steel Series are operator-fed, adjustable, carton-sealing machines designed to cater to the needs of light to heavy duty, uniform carton closure applications where there are wet environments. Units are available for either splash resistant or wash-down applications. The two bottom belts are driven by one bottom drive electric 110V UL approved motor.




**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION


[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.0\_0224

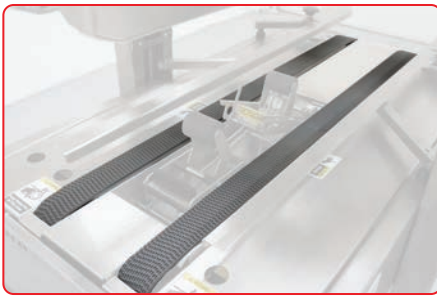

### BOTTOM BELT DRIVE

Gently pulls product through while reducing less wear and tear on parts.

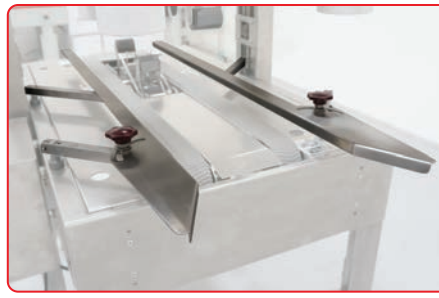

### GUIDE RAIL MECHANISM

Centers carton for a clean, consistent seal.



### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



### DUAL TELESCOPING MAST

Stronger design, capable of precise adjustments resulting in, a clean, consistent seal.



### TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.




### MOUNTING OF ON/OFF ELECTRICAL BOX

Provides flexibility in workflow process.

## MACHINE FOOTPRINT

Specifications based on MBD22-2S

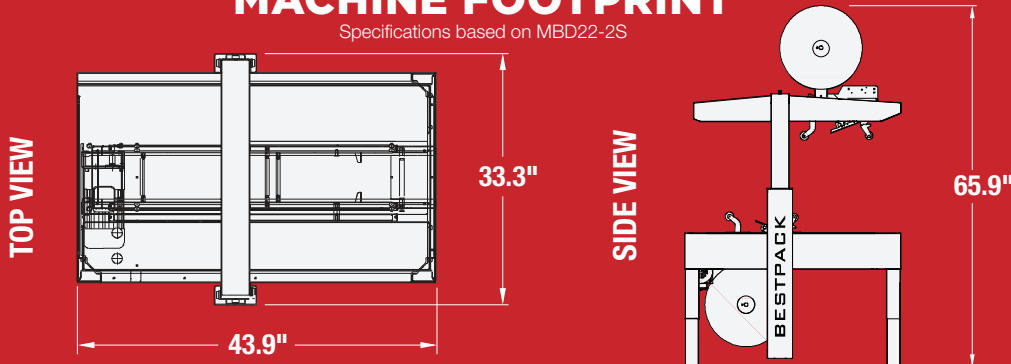

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Additional Safety Options
- Food Grade 304 Stainless Steel Infeed/Exit Conveyors
- Food Grade 304 Stainless Steel Heavy Duty Caster
- High-Speed Options (Up to 125 ft. per min.)

## POPULAR MBD-S MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MBD22-2S 2" Tape Head	(43.9") x (33.3") x (65.9")	(6.0" - U) x (6.5" - 20.0") x (3.0" - 20.25")	(23.5" - 30.0")	Up to 20	320	110 Volts 60 Hz
MBD22-3S 3" Tape Head	(43.9") x (33.3") x (65.9")	(6.0" - U) x (7.5" - 20.0") x (3.0" - 20.25")	(23.5" - 30.0")	Up to 20	320	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

U - UNLIMITED | \*OUTSIDE DIMENSIONS ONLY  
\*\* BASED ON CUSTOMER APPLICATION



For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**