









FREE PRODUCT SUPPORT:

TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPOR

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BESTPACK.COM

MSDBF MANUAL SIDEDRIVE DUAL MAST FLAP FOLDER

The BestPack™ MSDBF sealer is a unique multi-purpose machine. Featuring a convenient top 3-flap folder and bottom T-rail leading to an extended side-drive system, the MSDBF enables a person to efficiently erect, pack, flap fold, and seal a carton in one station. Dual telescopic masts allow for an extra 4" carton height extension on the upper assembly and two 110V UL-approved electric motors power the extended side belt drive.

VERSION 5.0_1123




EXTENDED BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.



T-RAIL PACKING STATION

Manual erecting and packing solution creating an all-in-one packaging solution.



UNIFORM TOP & BOTTOM FLAP FOLDER

Eliminates repetitive manual folding of flaps, improving worker efficiency.



TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.




DUAL TELESCOPING MASTS

Stronger design, capable of precise adjustments resulting in a clean, consistent seal.



ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

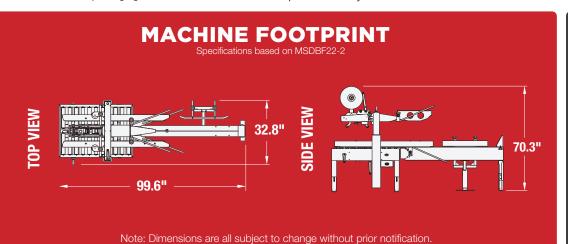

OPTIONS

- Available in Stainless Steel
- Additional Safety Options
- Infeed/Exit Conveyor and Casters
- Reinforcement Kit for Heavy Products
- High-Speed Options

 High Speed Motor Upgrade
 (125ft per min.)
- Widened T-rail Adapter for Bulk Filling of Small or Loose Products

POPULAR MSDBF MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min max.) x WIDTH (min max.) x HEIGHT (min max.)	CONVEYOR HEIGHT HEIGHT (min max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MSDBF22-2 2" Tape Head	(99.6") x (32.8") x (70.3")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0" - 19.6")	(23.5" - 30.0")	Up to 15	420	110 Volts 60 Hz
MSDBF22-3 3" Tape Head	(99.6") × (32.8") × (70.3")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0" - 19.6")	(23.5" - 30")	Up to 15	420	110 Volts 60 Hz
MSDBF32-2 2" Tape Head	(125.0") x (43.8") x (70.3")	(14.0" - 48.0") x (12.0" - 30.0") x (6.0" - 19.6")	(23.5" - 30")	Up to 15	648	110 Volts 60 Hz
MSDBF32-3 3" Tape Head	(125.0") x (43.8") x (70.3")	(14.0" - 48.0") x (12.0" - 30.0") x (6.0" - 19.6")	(25.8" - 30")	Up to 15	648	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY I U - UNLIMITED I ALL MODELS AVAILABLE IN HIGH SPEED & FOOD GRADE 304 STAINLESS STEEL

