


MANUAL LOW PROFILE

CARTON SEALING SOLUTION

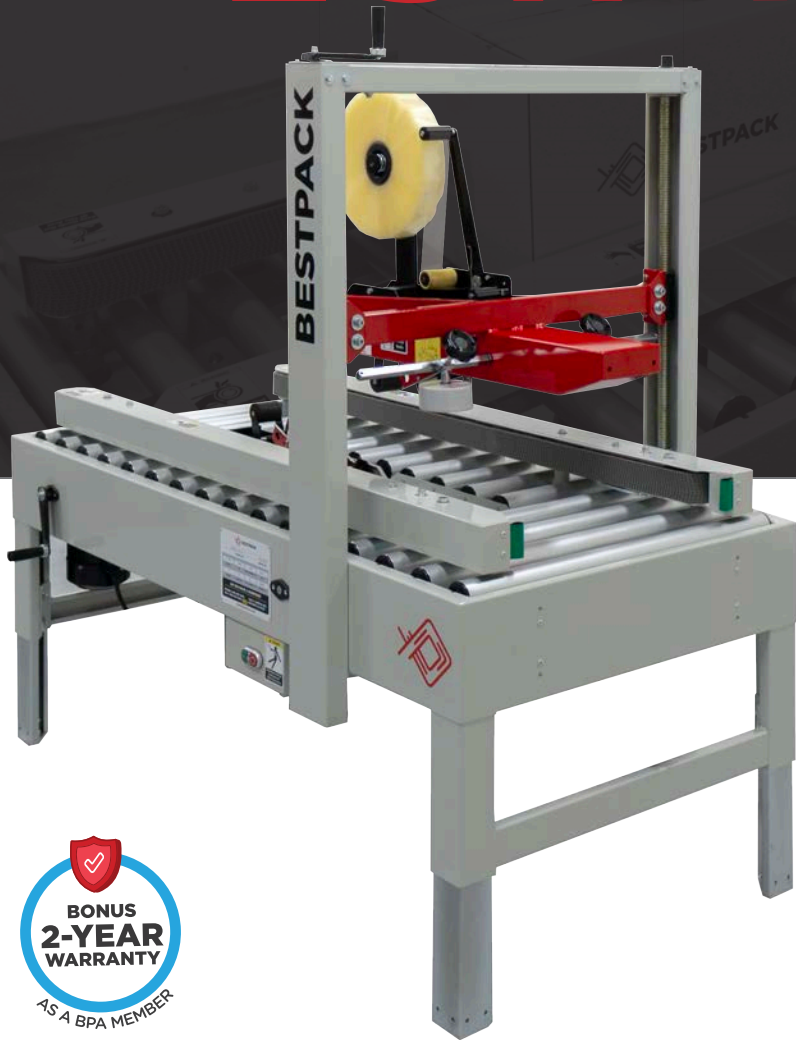

**SEALS
CARTONS**

AS LOW AS 2.5" IN HEIGHT

QUICK HIGHLIGHTS

SEALS UP TO 40 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Offset Tape Heads
- Dual Telescoping Masts
- Seals Low Profile Uniform Sized Cartons


CARTON RANGE

Specifications based on MSL22-2

Length
(min.-max.)
(6.0"-U")

Width
(min.-max.)
(5.7"-21.0")

Height
(min.-max.)
(2.5"-20.5")



MSL MANUAL SIDEDRIVE LOW PROFILE

The BestPack™ MSL is an operator fed, adjustable carton sealer designed to effectively seal very low-profile boxes, in addition to the standard array of carton sizes. The MSL can seal cartons a mere 2.5" high and the upper mast allows for an extra 4" carton height extension on the upper assembly.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION


WWW.BESTPACK.COM

VERSION 5.1_0225



OFFSET TAPE HEADS

Enables precise and efficient sealing of low-profile cartons, individually sealing top and bottom of carton.

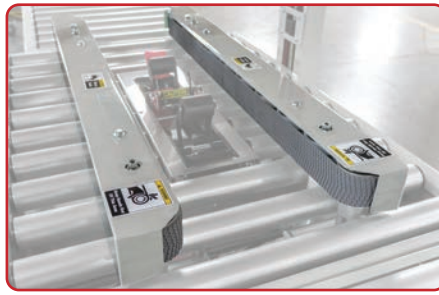

SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.



LOW PROFILE SEALER

Effectively seals very low-profile boxes with a clean and consistent seal.



TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

MACHINE FOOTPRINT

Specifications based on MSL22-2

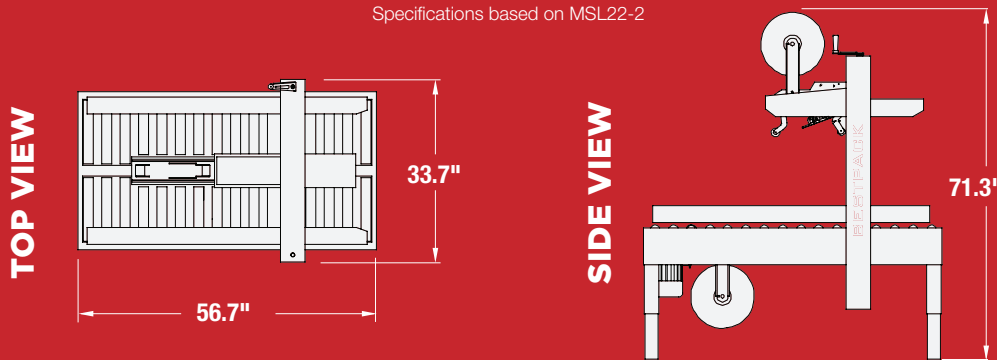

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High-Speed Motor Upgrade (up to 125 ft. per min.)
- Heavy Duty Locking Casters
- Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- 3 Flap Folder
- Available in Stainless Steel

POPULAR MSL MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MSL22-2 2" Tape Head	(56.7") x (33.7") x (71.3")	(6.0" - U) x (5.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 40	400	110 Volts 60 Hz
MSL22-2NC 2" Tape Head	(56.7") x (33.7") x (71.3")	(6.0" - U) x (5.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 40	400	110 Volts 60 Hz
MSL22-3 3" Tape Head	(56.7") x (33.7") x (71.3")	(6.0" - U) x (6.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 40	400	110 Volts 60 Hz
MSL22-3NC 3" Tape Head	(56.7") x (33.7") x (71.3")	(6.0" - U) x (5.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 40	400	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED



For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.