

RANDOM QUAD DRIVE

CARTON SEALING SOLUTION



PERFECT FOR:
HEAVY DUTY & UNSTABLE CARTONS

QUICK HIGHLIGHTS


SEALS UP TO 15 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 2 Top and 2 Side Belt Drive System for Heavy and Unstable Cartons
- Increased Throughput of Heavy and Tall Unstable Cartons
- Mounting of Electrical Box on Either Side
- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons

CARTON RANGE

Specifications based on RQ22-2

| Length (min. - max.) | Width (min. - max.) | Height (min. - max.) |
|-------------------------|------------------------|-------------------------|
| (7.0" - U) | (7.5" - 21.0") | (4.5" - 20.0") |



RQ RANDOM QUAD DRIVE

The BestPack™ RQ Series is a Semi-Automatic Random Tape Carton Sealer built for speed and rugged dependability. With a quad-belt drive, the RQ is a heavy-duty work horse that effectively seals unstable cartons, including cartons that are taller than they are long, overfilled, very heavy, or otherwise difficult to seal.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BESTPACK.COM



"SOFT TOUCH" PNEUMATIC SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.



2 TOP AND 2 SIDE BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

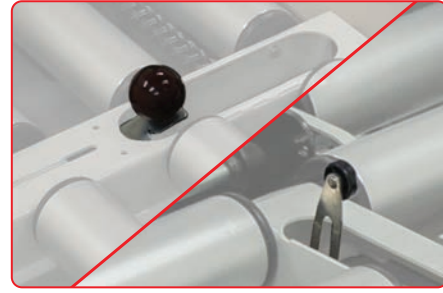

INFEED AND EXIT LIMIT SWITCHES

Starts and resets upon activation, decreases energy consumption and risk of injury.



CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.

MACHINE FOOTPRINT

Specifications based on RQ22-2



Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High-Speed Options (Up to 125 ft. per min.)
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Heavy Duty Casters

POPULAR RQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

| MODEL | MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT | CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.) | CONVEYOR HEIGHT HEIGHT (min. - max.) | CARTONS PER MIN. | SHIPPING WEIGHT (LBS) | POWER REQUIREMENTS | AIR REQUIREMENTS |
|--------------------------|---|--|---|------------------|-----------------------|--------------------|-------------------------|
| RQ22-2 2" Tape Head | (42.8") x (34.6") x (57.5") | (7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0") | (20.5" - 30.0") | Up to 15 | 535 | 110 Volts 60 Hz | 90-100 PSI, 6-8 SCFM |
| RQ23-3 3" Tape Head | (42.8") x (34.6") x (57.5") | (7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0") | (20.5" - 30.0") | Up to 15 | 535 | 110 Volts 60 Hz | 90-100 PSI, 6-8 SCFM |
| RQ23-2 2" Tape Head | (42.8") x (34.6") x (76.0") | (7.0" - U) x (7.5" - 21.0") x (4.5" - 30.0") | (20.5" - 30.0") | Up to 13 | 575 | 110 Volts 60 Hz | 90-100 PSI, 6-8 SCFM |
| RQ44-3** 3" Tape Head | (42.8") x (54.7") x (86.0") | (7.0" - U) x (7.5" - 40.0") x (6.0" - 40.0") | (24.5" - 30.0") | Up to 12 | 735 | 110 Volts 60 Hz | 90-100 PSI, 6-8 SCFM |

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY
U - UNLIMITED
**HIGH SPEED



BESTPACK

For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2024 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.