

EXPERIENCE THE CONVENIENCE OF EASY-PEEL TECHNOLOGY

CARTON SEALING TAPE



EASILY REMOVE
WITHOUT USING A BLADE

QUICK HIGHLIGHTS

- Unlimited Shelf Life
- UV Light Resistant
- Specially Formulated 110% Elongation Low Stretch Cast Film (Increasing Machine Length Roll Performance)
- Specially Formulated ROHM & HAAS (for use in Hot & Cold Temperature)
- RoHS Compliant
- Meets FDA Food Requirements for Indirect Food Contact

1.6 MIL (40 MICRON)* Total Thickness	16 oz/inch WIDTH*** Peel Adhesion	0.6 MIL (15 MICRON)* Adhesive Thickness
1.0 MIL (25 MICRON)* Film Thickness	20 LBS/IN WIDTH** Tensile Strength	110%** Elongation % At Break
Test Methods: * ASTM D-3652; ** ASTM D-3759; *** ASTM D-3330		

SERVICE TEMPERATURE
Minimum Temp.: -30°F Maximum Temp.: 200°F

USAGE & STORAGE TEMPERATURE
Minimum Temp.: 32°F Maximum Temp.: 150°F


IDEAL STORAGE TEMPERATURE
Ideal Storage Temp.: 77°F +/- 5°F Ideal Storage Humidity: 55% +/- 5%

Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. BestPack recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.

*Contact Your Local BestPack Representative for More Information



LEARN MORE ABOUT OUR TAPE:
BROCHURES | MATERIAL SAFETY DATA SHEET | ROHS INFORMATION

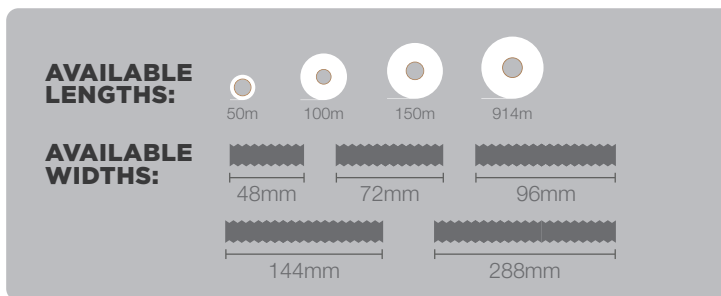

EZ PEEL TAPE

MADE WITH ROHM & HAAS ACRYLIC ADHESIVE

EZ-Peel Tape is a new innovation that has deadened adhesive on the edge of the film for easy removal of tape. No more accidental cuts and/or punctures into product. EZ-peel provides the quality seal you're looking for and prevents damage on products. Available in both hand and machine rolls.