

FASTER AND MORE PRECISE SERVO POWERED

CARTON SEALING SOLUTIONS



EQUIPPED WITH
2 SERVO MOTORS
FOR PRECISION AND SPEED

QUICK HIGHLIGHTS

SEALS UP TO 20 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons
- Equipped with 2 Servo Motors, HMI, Allen-Bradley PLC and VFD
- Carton Bypass Feature (By Pass Folding & Top Sealing)
- Low Tape/No Tape Monitoring System





CARTON RANGE

Specifications based on CSD222

Length
(min.-max.)
(8.0"-25.5")

Width
(min.-max.)
(4.0"-20.0")

Height
(min.-max.)
(4.0"-20.0")

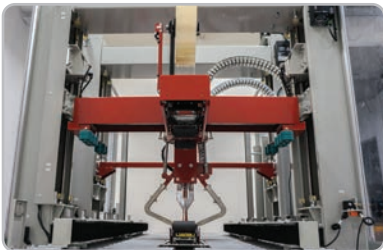

CSD FULLY AUTOMATIC RANDOM SERVO CARTON SEALER

The BestPack™ CSD is a Fully Automatic Random Carton Sealer that uses dual servo motors on the folding and sealing section providing precision & accuracy for carton sealing repeatability. Our **complimentary level 1** tech support uses the VPN module in the CSD, to enable our technicians to detect real-time machine issues for timely assistance and optimal performance. The CSD provides the best fully automatic technology at an affordable price.




FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

WWW.BESTPACK.COM

VERSION 2.0_1123

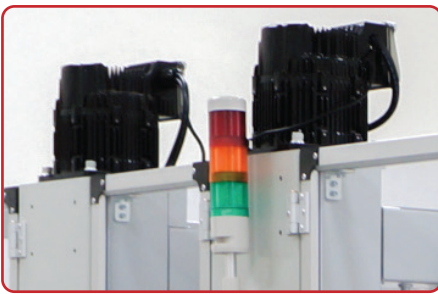


DUAL SERVO MOTORS POWERED

Provides precise control of position and speed on the Flap Folding Station and Sealing Station.



BESTPACK'S "SOFT TOUCH" SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.

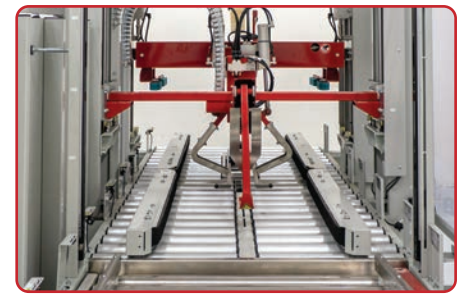

3 INDEPENDENT STATION

Increased throughput speed by indexing, flap folding, and sealing multiple cartons in one seamless operation.



EWON VPN WIFI MODULE

Allows for easy diagnosis for your machine saving you on costly maintenance visits and downtime.



HMI- HUMAN MACHINE INTERFACE

Operator controls panel that provides reliable data & troubleshooting at your fingertips.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.


MACHINE FOOTPRINT

Specifications based on CSD222

TOP VIEW

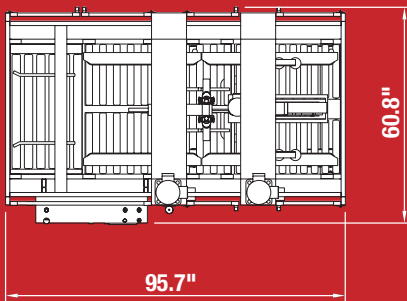

SIDE VIEW

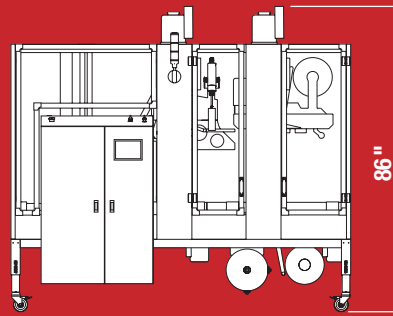

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- Available in Stainless Steel
- Bypass Capabilities
 - Bypass Folding and Top Sealing
 - Bypass Folding & Both Top & Bottom Sealing
- Platform to Raise Machine Bed Height to 31" to 37"
- Additional safety options
 - Entry/Exit Gates
 - AB Safety Relay, Dual Channel
 - Interlocks and Dump Valves

POPULAR CSD MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN. ***
CSD222L-2H-A0 2" Tape Head	(95.7") x (60.8") x (86.0")	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	208 Volts 60 Hz 3 Phase 20 Amp	80 PSI, 5 SCFM	Up to 57
CSD222L-3H-A0 3" Tape Head	(95.7") x (60.8") x (86.0")	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	208 Volts 60 Hz 3 Phase 20 Amp	80 PSI, 5 SCFM	Up to 34
CSD222R-2H-A0 2" Tape Head	(95.7") x (60.8") x (86.0")	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	208 Volts 60 Hz 3 Phase 20 Amp	80 PSI, 5 SCFM	Up to 57
CSD222R-3H-A0 3" Tape Head	(95.7") x (60.8") x (86.0")	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	208 Volts 60 Hz 3 Phase 20 Amp	80 PSI, 5 SCFM	Up to 34

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED | ALL MODELS AVAILABLE IN HIGH SPEED



For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.